

THIS WINTER

Come home to the easy warmth of a

summer day

SUMMERAIRE

O I L F U R N A C E

SFLO



SLO



The quiet strength of proven performers

Since 1953 Trent Metals has been manufacturing and designing H.V.A.C. equipment. At the heart of Summaire furnaces, are vacuum formed, cerafelt combustion chambers designed for maximum heat transfer, low noise and efficiency. With a high output Flame Retention Head Oil Burner and a resilient - mounted whisper - smooth blower, a Summaire furnace is designed for many, many years of quiet, dependable operation.... just what you've been looking for in an oil furnace.

Easy to install... easy to service.

A lot of quality engineering and on the job know - how has gone into the development of Summaire furnaces, especially in the important areas of installation and servicing. Full length steel runners on the heavy gauge cabinet base make for quick and easy handling. In addition, the flexible design and handling features allow for wider installation options, including a 2 speed fan (standard on direct drive models). With a Summaire furnace on the job, you'll breathe easier and that's what home heating is all about!

Front and Rear Breach Lowboy Oil Fired Furnaces

Modern compact design allows more installation options. Easily adjustable - quiet belt - drive or direct drive blowers are adaptable to most duct systems. Convenient for the serviceman - large cleanout(s) allow easy access to the heat exchanger... saves you money on your annual service costs!

20 Year Heat Exchanger Warranty!

The Heat Exchanger of all Summaire Low - Boy furnaces is covered by a Full Twenty (20) Year, automatically transferable Heat Exchanger Warranty. (See Warranty Certificate for details)


5 Year Parts Warranty!

All components of the Summaire Low - Boy furnaces are covered by a Full Five (5) Year Warranty. (See Warranty Certificate for details). Beckett "AF" oil burner available on SLO and SFLO 115 models. Riello oil burners are available on RME and RFME Low - Boy models.


SPECIFICATIONS - LOW - BOY OIL - REAR FLUE SLO115 - FRONT FLUE - BECKETT "AF" BURNER

MODEL	U.S.G.P.H. INPUT	B.T.U.H. OUTPUT	BLOWER	MOTOR H.P. BELT DRIVE	MOTOR H.P. DIRECT DRIVE	C.F.M.@85F TEMP. RISE @.20" E.S.P.	AIR FILTER	COOLING CAPACITY C.F.M. RANGE
SLO115** SFLO115 SLO115-DD** SFLO115-DD	.65	76000	G10	1/3	1/2 - 4	785	20 x20 x 1	660 - 950
	.75*	87000	G10	1/3	1/2 - 4	890	20 x20 x 1	760 - 1080
	.85	98000	G10	1/3	1/2 - 4	1015	20 x20 x 1	860 - 1220
	1.00	114000	G10	1/3	1/2 - 4	1220	20 x20 x 1	1030 - 1470


* FACTORY SUPPLIED NOZZLE ** CERTIFIED FOR INSTALLATION WITH TJERNLUND SS1-C POWER VENTOR

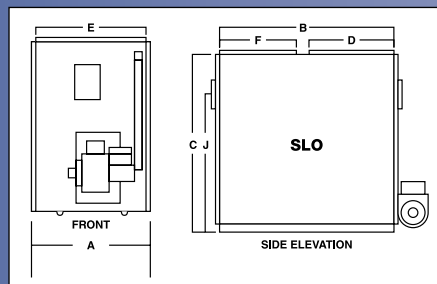

DIMENSIONS LOWBOY

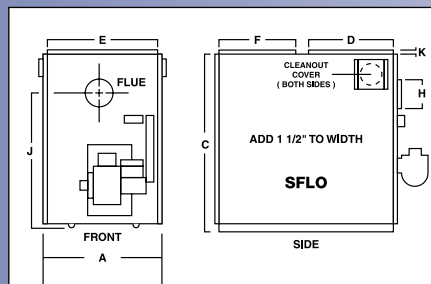

OPTIONAL VESTIBULE AVAILABLE FOR SLO115

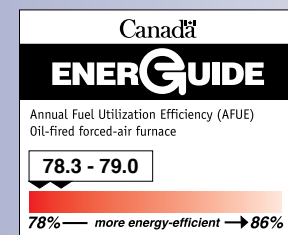

SLO115/SFLO115

MODEL	CABINET			PELNUM OPENINGS		FLUE		SHIPPING WEIGHT
	WIDTH A	DEPTH B	HEIGHT C	WARM AIR D x E	RETURN AIR F x E	DIAMETER H	HEIGHT J	POUNDS
SLO115	23	41	42 1/2	20 X 21 1/2	17 1/2 X 21 1/2	7	37 1/2	290
SFLO115	23	41	42 1/2	20 X 21 1/2	17 1/2 X 21 1/2	7	32 1/8	290



Summaire Mfg.
Peterborough, Ontario, Canada, K9J 7B1

F-SLO-SFLO-SS-EN-REV7
Specifications and illustrations subject to change without notice and without incurring obligations.