

Low Boy High Efficiency Oil Furnace



Efficiency up to
87.2% AFUE



Built Better to Last Longer

www.summertime.com




SLO - Low Boy High Efficient Oil Furnace

- Certified for Direct Vent or Chimney Vent with or without the use of a barometric damper (without a barometric damper is ideal for installations where a negative pressure may exist).
- Air Conditioning Ready
- Optional "ECM" equipped models provide energy savings with infinite blower speed control for more even heating or cooling distribution.
- Conventional blower assembly offers 3 speed operation to ensure even air flow throughout your home; continuous low speed can be turned off with the push of a switch.
- External terminal strips for ease of thermostat connections.
- Certified with Riello "BF3, 40F3" or Becket "NX" burners for maximum efficiency and quiet long lasting comfort
- 5" diameter rear breech
- All stainless steel heat exchanger (no combustion chamber) for fast heat transfer, quiet operation and long life
- Small size, permits installation in very tight spaces - approved for closet or alcove installations
- 20 year heat exchanger limited warranty
- 5 year limited warranty on all components
- Easy maintenance


MODEL PSC	NOZZLE	B.T.U.H. INPUT	B.T.U.H. OUTPUT	BLOWER	P.S.C. MOTOR	C.F.M. @ 0.2" ESP	C.F.M. @ 0.5" ESP	AIR FILTER	COOLING CAPACITY
SLO50P	.50 - 60°W	65,800	53,300	GT100DD	1/3 HP 3 SPEED	1030	875	18" X 20"	UP TO 3 TONS
SLO70P	.50 - 60°W	80,500	70,000	GT100DD	1/3 HP 3 SPEED	1250	1100	18" X 20"	UP TO 3 TONS
SLO80P	.60 - 70°W	95,300	81,300	GT100DD	1/3 HP 3 SPEED	1250	1100	18" X 20"	UP TO 3 TONS
SLO90P	.65 - 70°W	104,000	89,800	GT100DD	1/3 HP 3 SPEED	1250	1100	18" X 20"	UP TO 3 TONS
SLO100P	.75 - 70°W	116,000	97,600	GT100DD	1/3 HP 3 SPEED	1250	1100	18" X 20"	UP TO 3 TONS
MODEL ECM	NOZZLE	B.T.U.H. INPUT	B.T.U.H. OUTPUT	BLOWER	E.C.M. MOTOR	C.F.M. @ 0.2" ESP	C.F.M. @ 0.5" ESP	AIR FILTER	COOLING CAPACITY
SLO50E	.50 - 60°W	65,800	53,300	GT100DD	1/3 HP	850-1300	850-1300	18" X 20"	UP TO 3.5 TONS
SLO70E	.50 - 60° W	80,500	70,000	GT100DD	1/3 HP	850-1300	850-1300	18" X 20"	UP TO 3.5 TONS
SLO80E	.60 - 70° W	95,300	81,300	GT100DD	1/3 HP	850-1300	850-1300	18" X 20"	UP TO 3.5 TONS
SLO90E	.65 - 70° W	104,000	89,800	GT100DD	1/3 HP	850-1300	850-1300	18" X 20"	UP TO 3.5 TONS
SLO100E	.75 - 70° W	116,000	97,600	GT100DD	1/3 HP	850-1300	850-1300	18" X 20"	UP TO 3.5 TONS

Factory shipped nozzle – .60 - 70 ° W Note: 4 approved optional nozzles shipped with burner.

CABINET			PLENUMS		FLUE		SHIPPING WEIGHT
WIDTH	HEIGHT	DEPTH	WARM AIR	RETURN AIR	DIAMETER	HEIGHT	
18 1/4"	31 1/4"	42 3/4"	16 3/4" X 19 7/8"	16 3/4" X 16"	5"	27 1/4"	175lbs/80kg Incl. Burner



Intertek
3182645

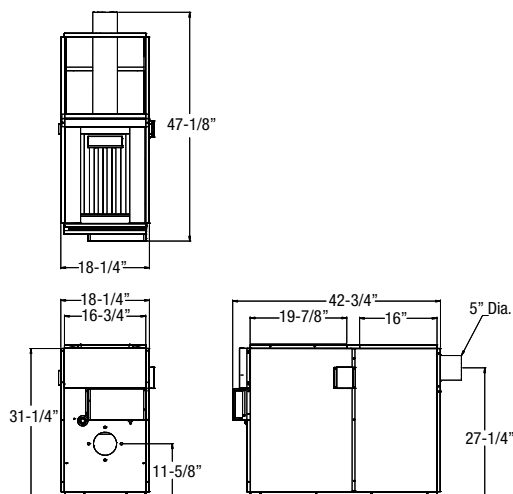

Built Better to Last Longer

Peterborough, ON, Canada K9J 6X6

Phone: 705-745-4736

Fax: 705-745-6491

www.summairaire.com

F-SLO80-SS-EN-REV19

Specifications and illustrations subject to change without notice and without incurring obligations.