

NOW YOU'RE GETTING

Warmer

minithermo

Big performance in a small package



- Design features make installation and maintenance a breeze
- Chimney or power sidewall venting
- Optional vestibule available
- Vacuum formed combustion chamber
- Choice of Beckett or Riello Burner
- Big Performance in a Small Package

COZY UP TO SOME

Comforting features



With optional vestibule




Standard (no vestibule)

Come in from the cold and enjoy the best in home comfort with the Summeraire

The multi-fired MiniThermo gives you big performance in a small package, and adjusts with ease to suite the heating requirements of the average home. With outstanding features and long-lasting dependability, the MiniThermo will leave you feeling warm all over!

minithermo

DIMENSIONS	Model	Cabinet				Plenum Openings		Flue		Shipping Wt.
		Width A	Depth B	Height C	Length With Vestibule E	Warm Air	Return Air	Diameter F	Height D	LBS
	SMO112	22"	44 1/2"	34"	55 1/2"	20" X 20"	20" X 19"	5"	28"	250

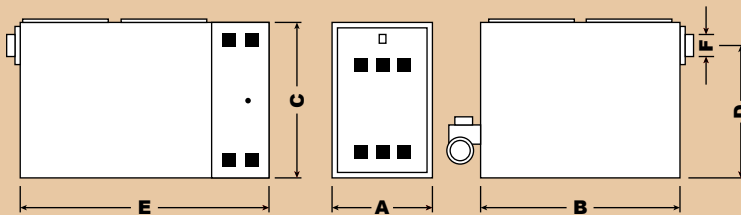

- Enjoy rapid heat transfer and quiet operation thanks to the MiniThermo's vacuum formed ceramic combustion chamber.
- High efficiency Beckett or Riello oil burners available.
- Warm up with the heavy, 14 gauge primary heat exchanger, partnered with the tubular design of the secondary heat exchanger which adds up to more efficient use of your heating dollar.
- Get the correct air volume for maximum comfort - even when air conditioning is added, from the whisper-quiet, 4 speed direct drive blower assembly.
- Equalize temperatures throughout your home with ease by activating the Select Switch for constant air flow.
- Keep the heat where it belongs, with the advantage of foil back fibre glass insulation that minimizes heat loss through the cabinet panels.
- Take pleasure in the long lasting, high quality finish of MiniThermo's furnace cabinet, which is 20 gauge powder coated steel.
- Enhance the appearance of your MiniThermo furnace with the optional vestibule.

Designed for maximum efficiency

You'll be impressed with MiniThermo, and not just for its superior performance. This furnace offers complete ease of maintenance. All components are easily accessible for fast, economical service, and the all-welded heat exchanger can be cleaned and maintained with little effort. It's the furnace designed with your service professional - and your pocketbook in mind!

Take comfort in our product - and our warranty

Year after year, you can count on the Summeraire MiniThermo to warm your home from top to bottom. And for added peace of mind, the dependable MiniThermo is backed by a solid warranty that covers all components for a full 5 years, and the heat exchanger for a full 20 years (automatically transferable). Now that's comfort for your body - and mind!

Specifications

- The MiniThermo is certified with the following oil burners BECKETT - AFG; RIELLO - 40F3;
- The MiniThermo is approved for venting in a conventional chimney; "L Vent;" and the SS1-C Tjernlund Sidewall Power Venter.
- Factory Supplied: 2 speed blower and built-in 120V service outlet.

Canada

ENERGUIDE

Annual Fuel Utilization Efficiency (AFUE)
Oil-fired forced-air furnace

79.0 - 82.7

78% — more energy-efficient —> 86%

SMO112

minithermo

SPECIFICATIONS

Model	Capacity BTU/HR		Blower	External Static Pressure. Inches WC		Cooling Capacity CFM Range
	Nozzle	Output		CFM at .20" Heating	HP	
SMO112	.60	70300	G10D	750	1/3	700 - 1470
	.65	76200	G10D	790	1/3	700 - 1470
	.75	85700	G10D	900	1/3	700 - 1470
	.85	98100	G10D	1020	1/3	700 - 1470
	1.00	113200	G10D	1230	1/3	700 - 1470

FACTORY SUPPLIED WITH .75 U.S.G.H. 60° Danfoss type "AB"



Summairaie Mfg.
Peterborough, Ontario, Canada, K9J 7B1



Made in Canada